


Service
Service
Service

HD 4287/A
HD 4288/A

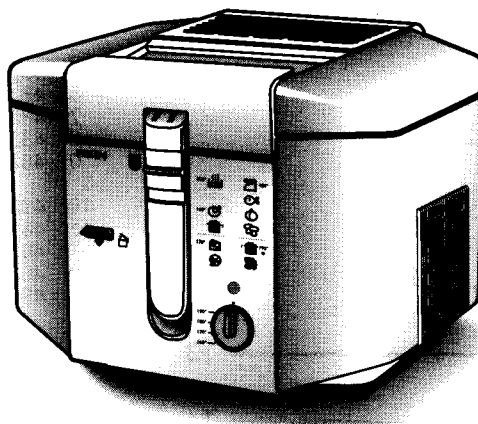

Domestic Appliances and Personal Care

Service Manual

MSH-coding
8824 287 00000
8824 288 00000

Product information

Voltage	: 120; 220-230; 240V
Frequency	: 50 - 60Hz
Power consumption	: 1500; 1830 - 2000; 2000W
Coloursetting	: ivory with orange parts
Contents of oil	: 2500cc
HD 4287	: standard fryer
HD 4288	: standard fryer with timer
Basket	: basket size of mesh 5x5 mm
Snackbasket	: Optional for both types
	: Size of mesh 3,5x4 mm


Service information

Thermal fuse cut-off temp.	: 228°C - 4°C
Oil temperature	: 185-210°C

The exploded view is based on HD 4288/A

Repair instructions

- Correct functioning of the lid item 1.**
For correct functioning of the fryer lid, the spring end A of spring item 2 must be fitted in the opening B of the inner plate. So during service operations, close attention has to be paid to a correct positioning of the spring end.

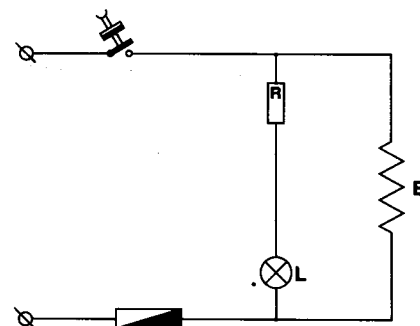

HD 4287/88/A

